

# New Criterion for Local Thermal Equilibrium in Porous Media

Xuwei Zhang\* and Wei Liu†  
Huazhong University of Science and Technology,  
430074 Wuhan, People's Republic of China

DOI: 10.2514/1.34623

**In this paper, a general criterion for local thermal equilibrium in forced convection flows through porous media under a constant heat flux boundary condition is presented in terms of parameters, including the boundary heat flux, the area of cross section, the effective thermal solid-to-fluid conductivity ratio, characteristic length for pore size, porosity, Nusselt number, fluid conductivity, and the heat source of solid phase. To check the validity of the proposed criterion for local thermal equilibrium, the forced convection phenomena in the porous medium between two parallel plates subjected to constant heat flux are studied by numerical method based on the Brinkman–Forchheimer extended Darcy model. The temperature difference between solid and fluid phases in a representative elementary volume are studied by comparing the effects of relevant parameters in this new criterion. In addition, the proposed criterion is consistent with the existing experimental and numerical results for convection heat transfer in a porous medium.**

## Nomenclature

$a_{sf}$	=	specific surface area
$C_f$	=	fluid specific heat
$D$	=	distance of parallel
$Da$	=	Darcy number
$d_p$	=	diameter of particle
$F$	=	geometric function
$h_{sf}$	=	interfacial heat transfer coefficient
$K$	=	permeability
$L$	=	characteristic length for system
$Nu$	=	Nusselt number
$Pr$	=	Prandtl number
$p$	=	pressure
$q$	=	heat source of solid phase, $W/m^3$
$q_w$	=	boundary heat flux, $W/m^2$
$Re_{dp}$	=	particle Reynolds number
$S$	=	flow section area
$T$	=	temperature
$t$	=	time
$u, v$	=	effective velocity components
$V$	=	volume of porous medium
$\eta$	=	viscosity of fluid
$\kappa$	=	effective solid-to-fluid thermal conductivity ratio
$\lambda$	=	conductivity of fluid or solid
$\rho$	=	density
$\varphi$	=	porosity

## Subscripts

eff	=	effective
f	=	fluid
in	=	inlet
s	=	solid
w	=	wall

Received 16 September 2007; revision received 10 March 2008; accepted for publication 10 March 2008. Copyright © 2008 by Xue-wei Zhang. Published by the American Institute of Aeronautics and Astronautics, Inc., with permission. Copies of this paper may be made for personal or internal use, on condition that the copier pay the \$10.00 per-copy fee to the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923; include the code 0887-8722/08 \$10.00 in correspondence with the CCC.

\*Doctor, School of Energy and Power Engineering.

†Professor, School of Energy and Power Engineering, Corresponding Author; w\_liu@mail.hust.edu.cn.

## I. Introduction

**F**LUID flow and heat transfer in a porous medium has been extensively investigated due to its relevance in a wide variety of engineering applications. From an energy equation point of view, there are two different models for investigating the energy transport in porous media: a local thermal equilibrium (LTE) model and a local thermal nonequilibrium (LTNE) model. The LTE model assumes the solid phase temperature is equal to that of the fluid phase in a representative elementary volume (REV), which is simple and straightforward, but valid only when the temperature difference between the solid and fluid phases is very small. The LTNE model requires additional information to account for the modes of energy communication between the two considered phases. A number of investigations have been reported on the validity of the LTE assumption in the forced convection channel flow.

Carbonell and Whitaker [1], Whitaker [2], and Quintard and Whitaker [3,4] presented a criterion for the validity of the assumption of LTE. Their criterion is proposed in the case where the effect of conduction is dominant. Amiri and Vafai [5] presented an error contour map in terms of the particle Reynolds number, the Darcy number, and the ratio of thermal diffusivity based on the qualitative ratings. Nield [6] concluded that the effect of LTE is to increase the Nusselt number at the interface between the fluid and solid phases. Lee and Vafai [7] proposed a criterion for the validity of the LTE model in the case of flow through a porous channel subjected to a constant heat flux on the top and bottom walls by using analytical solutions based on the Darcian flow model. Kim et al. [8] showed that the assumption of LTE in a microchannel heat sink, which is modeled as a porous medium, is valid as the Darcy number approaches zero and the effective fluid-to-solid thermal conductivity ratio goes to infinity. Even though studies on local thermal equilibrium have been conducted for many years, a general criterion for the validity of the local thermal equilibrium assumption has not been available, to the authors' knowledge.

The aim of this study is to present a more general criterion for the LTE assumption under the condition of constant wall heat flux. To do this, a theoretical analysis is performed for the case when the effect of convection heat transfer is dominant in a channel filled with particles. To check the validity of the new criterion for the LTE assumption, the steady-state incompressible flow through a porous bed between two parallel plates subjected to constant wall heat flux is studied by using the numerical method based on the Brinkman–Forchheimer extended Darcy model. The effects of the boundary heat flux, the area of cross section, the effective thermal solid-to-fluid conductivity

ratio, characteristic length for pore size, porosity, Nusselt number, fluid conductivity, and the heat source of the solid phase on the temperature difference between solid and fluid phases in a REV are studied systematically.

## II. Criterion for Local Thermal Equilibrium

The criterion derived for the case where conduction is dominant, by Carbonell and Whitaker [1], is expressed as

$$\frac{\varphi(\rho C_p)_f d_p^2}{t} \left( \frac{1}{\lambda_f} + \frac{1}{\lambda_s} \right) \ll 1 \quad (1)$$

where  $\varphi$ ,  $\rho$ ,  $C_p$ ,  $d_p$ ,  $t$ ,  $\lambda_f$ , and  $\lambda_s$  denote porosity, fluid density, fluid specific heat, characteristic length scale of pore size, time scale, fluid conductivity, and solid conductivity, respectively.

Another criterion mentioned by Kaviany [9] is expressed as

$$\Delta T_L \gg \Delta T_I \quad (2)$$

where  $\Delta T_L$  and  $\Delta T_I$  are the temperature difference occurring over the dimension of the system and the temperature difference between the solid phase and fluid phase in the REV, respectively.

The literature [10] deduces another criterion from Eq. (2) as follows:

$$Pr_{\text{eff},f} Re_{d_p} Da^{1/2} \frac{\varphi}{Nu} \ll 1 \quad (3)$$

where the effective fluid Prandtl number, the Reynolds number, the Darcy number, the Nusselt number, and the effective thermal diffusivity are defined, respectively, as

$$Pr_{\text{eff},f} = \frac{\nu}{\alpha_{\text{eff},f}}, \quad Re_{d_p} = \frac{u_p d_p}{\nu}$$

$$Da \sim \frac{d_p^2}{L^2}, \quad Nu = \frac{h_{\text{sf}} d_p}{k_f}$$

From the criterion, the effect of LTE on a porous medium is shown to become stronger as either any one of the Reynolds number, the Prandtl number, or the Darcy number decreases, or the Nusselt number increases.

Here, we present a new criterion.

There is a straightforward criterion: the temperature difference between the solid phase and the fluid phase in the REV is small:

$$T_s - T_f \rightarrow 0 \quad (4)$$

The volume-averaged energy equations of the solid phase is

$$\frac{\partial}{\partial x} \left( \lambda_{s,\text{eff}} \frac{\partial T_s}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda_{s,\text{eff}} \frac{\partial T_s}{\partial y} \right) - h_{\text{sf}} \alpha_{\text{sf}} (T_s - T_f) + q = 0 \quad (5)$$

When the effective conductivity of the solid is constant, Eq. (5) can be rearranged as

$$T_s - T_f = \frac{\lambda_{s,\text{eff}} [(\partial^2 T_s / \partial x^2) + (\partial^2 T_s / \partial y^2)] + q}{h_{\text{sf}} \alpha_{\text{sf}}} \quad (6)$$

The heat flux at the boundary is conducted to the solid phase and then transferred to the fluid phase by the interstitial heat transfer between the fluid phase and the solid phase. And so, the volume integral of the interstitial heat transfer rate is equal to the boundary heat flux to the solid phase:

$$q_s = \int_v \lambda_{s,\text{eff}} \left( \frac{\partial^2 T_s}{\partial x^2} + \frac{\partial^2 T_s}{\partial y^2} \right) = \int_l \lambda_{s,\text{eff}} \left( \frac{\partial T_s}{\partial y} \right)_w \quad (7)$$

The boundary heat flux to the fluid phase

$$q_f = \lambda_{f,\text{eff}} \left( \frac{\partial T_f}{\partial y} \right)_w \quad (8)$$

Here, we assume [11]

$$\left( \frac{\partial T_s}{\partial y} \right)_w = \left( \frac{\partial T_f}{\partial y} \right)_w \quad (9)$$

so that

$$q_s = q_w \frac{\lambda_{s,\text{eff}}}{\lambda_{s,\text{eff}} + \lambda_{f,\text{eff}}} = q_w \frac{\kappa}{\kappa + 1} \quad (10)$$

where the effective thermal conductivity ratio

$$\kappa = \frac{\lambda_{s,\text{eff}}}{\lambda_{f,\text{eff}}} \quad (11)$$

The volume-averaged temperature difference is

$$T_s - T_f = \frac{q_w (\kappa / \kappa + 1) L + qV}{h_{\text{sf}} \alpha_{\text{sf}} V} = \frac{(q_w / S) (\kappa / \kappa + 1)}{h_{\text{sf}} \alpha_{\text{sf}}} + \frac{q}{h_{\text{sf}} \alpha_{\text{sf}}} \quad (12)$$

The interstitial heat transfer coefficient, the interfacial surface area per unit volume, can be expressed as

$$h_{\text{sf}} = \frac{Nu \lambda_{f,\text{eff}}}{d_p}, \quad \alpha_{\text{sf}} = \frac{A \varphi}{d_p} \quad (13)$$

By substituting Eq. (13) into Eq. (12), the criterion for local thermal equilibrium is presented by the following equation:

$$T_s - T_f = \frac{(q_w / S) (\kappa / \kappa + 1) d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} + \frac{q d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} \quad (14)$$

So, the new criterion for local thermal equilibrium is

$$\frac{(q_w / S) (\kappa / \kappa + 1) d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} + \frac{q d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} \rightarrow 0 \quad (15)$$

or

$$\frac{(q_w / S) (\kappa / \kappa + 1) d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} + \frac{q d_p^2}{A \varphi Nu \lambda_{f,\text{eff}}} < (T_w - T_\infty) \cdot \text{allow error}(\%) \quad (16)$$

where  $q_w$ ,  $S$ ,  $\kappa$ ,  $d_p$ ,  $\varphi$ ,  $Nu$ ,  $\lambda_{f,\text{eff}}$ ,  $T_w$ ,  $T_\infty$ , and allow error (%) are the boundary heat flux, the area of cross section, the effective thermal solid-to-fluid conductivity ratio, characteristic length for pore size, porosity, Nusselt number, fluid conductivity, boundary temperature, the inlet fluid temperature, and the allow error for analysis.

## III. Mathematical Validation of the Criterion

### A. Mathematical Formulation

The mathematical validation of the criterion is carried out for the two-dimensional steady-state flow through a parallel plate channel with height  $D$ , length  $L$ , and aspect ratio  $L/D = 10$ . The channel is considered to be filled with homogenous and isotropic porous medium as illustrated in Fig. 1. In addition, the porous medium is considered to have no spatial variation in porosity throughout the whole region, and fluid is injected through the left inlet at a constant temperature with a uniform inlet velocity  $u_{\text{in}}$ . Moreover, the walls are considered thin and are subjected to a constant heat flux  $q_w$ . Furthermore, viscous dissipation, gravitational effects, natural convection, and thermal radiation heat transfer are all assumed to have negligible effects on the velocity and temperature fields.

The steady-state volume-averaged governing equations presented for the LTNE model are given as follows:

Continuity

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (17)$$

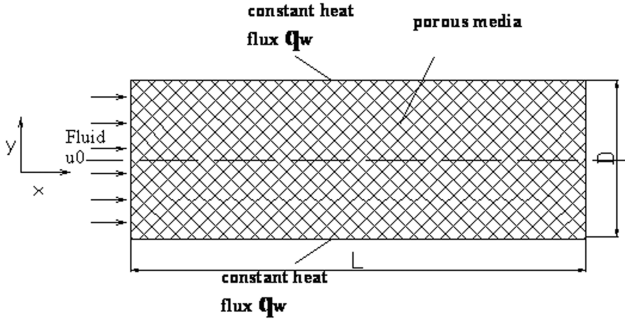


Fig. 1 Schematic diagram of a porous bed.

Momentum of X direction

$$\frac{\rho_f}{\varphi^2} \left( u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = -\frac{\partial P}{\partial x} + \frac{\eta}{\varphi} \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) - \frac{\eta}{k} u - \rho_f \frac{F}{\sqrt{k}} \sqrt{u^2 + v^2} u \quad (18)$$

Momentum of Y direction

$$\frac{\rho_f}{\varphi^2} \left( u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} \right) = -\frac{\partial P}{\partial y} + \frac{\eta}{\varphi} \left( \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) - \frac{\eta}{k} v - \rho_f \frac{F}{\sqrt{k}} \sqrt{u^2 + v^2} v \quad (19)$$

Fluid phase energy

$$\frac{\partial(C_f \rho_f u T_f)}{\partial x} + \frac{\partial(C_f \rho_f v T_f)}{\partial y} = \frac{\partial}{\partial x} \left( \lambda_{f,\text{eff}} \frac{\partial T_f}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda_{f,\text{eff}} \frac{\partial T_f}{\partial y} \right) + h_{sf} \alpha_{sf} (T_s - T_f) \quad (20)$$

Solid phase energy [which is the same as Eq. (5)]

$$\frac{\partial}{\partial x} \left( \lambda_{s,\text{eff}} \frac{\partial T_s}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda_{s,\text{eff}} \frac{\partial T_s}{\partial y} \right) - h_{sf} \alpha_{sf} (T_s + T_f) + q = 0$$

The permeability [12] of the packed bed is

$$K = \frac{\varphi^3 d_p^2}{150(1 - \varphi)^2} \quad (21)$$

whereas the geometric function  $F$  [13] is

$$F = \frac{1.75}{150\varphi^{3/2}} \quad (22)$$

The effective viscosity of fluid is written as

$$\mu_{\text{eff}} = \mu_f$$

The effective thermal conductivity of both phases are defined as

$$\lambda_{f,\text{eff}} = \varphi \lambda_f, \quad \lambda_{s,\text{eff}} = (1 - \varphi) \lambda_s$$

The specific surface area  $\alpha_{sf}$  of the bed can be expressed as

$$\alpha_{sf} = 6(1 - \varphi)/d_p \quad (23)$$

The fluid-to-solid heat transfer coefficient [14] is

$$Nu = h_{sf} d_p / \lambda_f = 2.0 + 1.1 Pr^{1/3} Re_{d_p}^{0.6} \quad (24)$$

A no-slip boundary condition at the wall is employed for the momentum equation, whereas the boundary conditions for the energy equations are as follows [11]:

$$T_f = T_s, \quad q_s = -\lambda_{s,\text{eff}} \left( \frac{\partial T_s}{\partial y} \right)_w$$

$$q_f = -\lambda_{f,\text{eff}} \left( \frac{\partial T_f}{\partial y} \right)_w, \quad q_f + q_s = q_w$$

## B. Results and Discussion

The numerical solution of the momentum and energy equations, described in the preceding paragraphs, is obtained by using the finite volume method. The SIMPLE algorithm for the pressure–velocity coupling is used. Convergence is measured in terms of the maximum change in each variable during iteration at each time increment. The maximum change allowed for the convergence check is set to  $10^{-6}$  for the energy equation and  $10^{-4}$  both for continuity and momentum equations. All computations have been carried out for a half-parallel channel  $L \times (D/2)$  by using nonuniform grid arrangements with  $1000 \times 100$  to ensure the results are independent of the grid system.

The influences of pertinent parameters mentioned in Eq. (15) on the temperature difference between the solid phase and the fluid phase are shown in Fig. 2. During calculation of the effect of  $q_w$ ,  $1/S$ ,  $\kappa/(\kappa + 1)$ ,  $d_p^2$ ,  $1/\lambda_{f,\text{eff}}$ , the other parameters keep constant, as follows,  $q_w = 100 \text{ W/m}^2$ ,  $1/S = 0.1 \text{ m}^2$ ,  $\kappa = 20$ ,  $d_p = 0.005 \text{ m}$ ,  $\lambda_{f,\text{eff}} = 0.0242 \text{ W/(m} \cdot \text{K)}$ , and the  $Nu$  is calculated by Eq. (24). But when calculating the effect of  $Nu$ , Eq. (24) is not included, but is used as an independent variable. When calculating the effect of the solid phase heat source,  $q_w = 0$ , that is to say, the wall is adiabatic.

As shown in Fig. 2, the temperature difference between the solid phase and the fluid phase increases linearly with the increase of  $q_w$ ,  $1/S$ ,  $\kappa/(\kappa + 1)$ ,  $d_p^2$ ,  $1/\lambda_{f,\text{eff}}$ ,  $1/Nu$ , and  $q$ , which implies the assumption in Eq. (9) is reasonable. From the numerical calculation shown in Fig. 2, the effect of local thermal equilibrium on a porous media is more obvious with the decrease of the  $q_w$ ,  $1/S$ ,  $d_p^2$ , and  $q$ , as well as with the increase of the Nusselt number and effective fluid thermal conductivity. In addition, when the effective solid-to-fluid thermal conductivity ratio is small, its effect is significant.

## IV. Discussion About the Criterion

### A. Discussion About the Nusselt Number

During the validation of the new criterion, the Nusselt number, based on the interstitial heat transfer coefficient presented by Wakao et al. [14], has been applied. However, for other porous media, the Nusselt number is calculated by the equation presented by other references.

In the microchannel heat sink subject to an impinging jet, the Nusselt number can be represented by the following correlation [10]:

$$Nu = 1.2434 Re_{d_p}^{0.1368} Pr_{\text{eff},f}^{0.161} + 2.0 \quad (25)$$

For the sintered metal, Kar and Dybbs [15], as well as Maiorov et al. [16], suggested the Nusselt number based on the interstitial heat transfer coefficient be written as

$$Nu = \frac{h_{sf} d_p}{\lambda_f} \sim C Re_{d_p}^n \quad (0 < Re_{d_p} < 10^2) \quad (26)$$

$n \approx 1.35$  in Kar and Dybbs [15],

$$Nu = \frac{h_{sf} d_p}{\lambda_f} \sim C Re_{d_p}^n \quad (0 < Re_{d_p} < 10^3) \quad (27)$$

$0.65 < n < 1.84$  in Maiorov et al. [16].

For the cellular ceramic, the Nusselt number presented by Fu et al. [17] is

$$Nu = \frac{h_{sf} d_p}{\lambda_f} \sim C Re_{d_p}^n \quad (0 < Re_{d_p} < 10^3) \quad (28)$$

$0.9 < n < 1.18$  in Fu et al. [17].

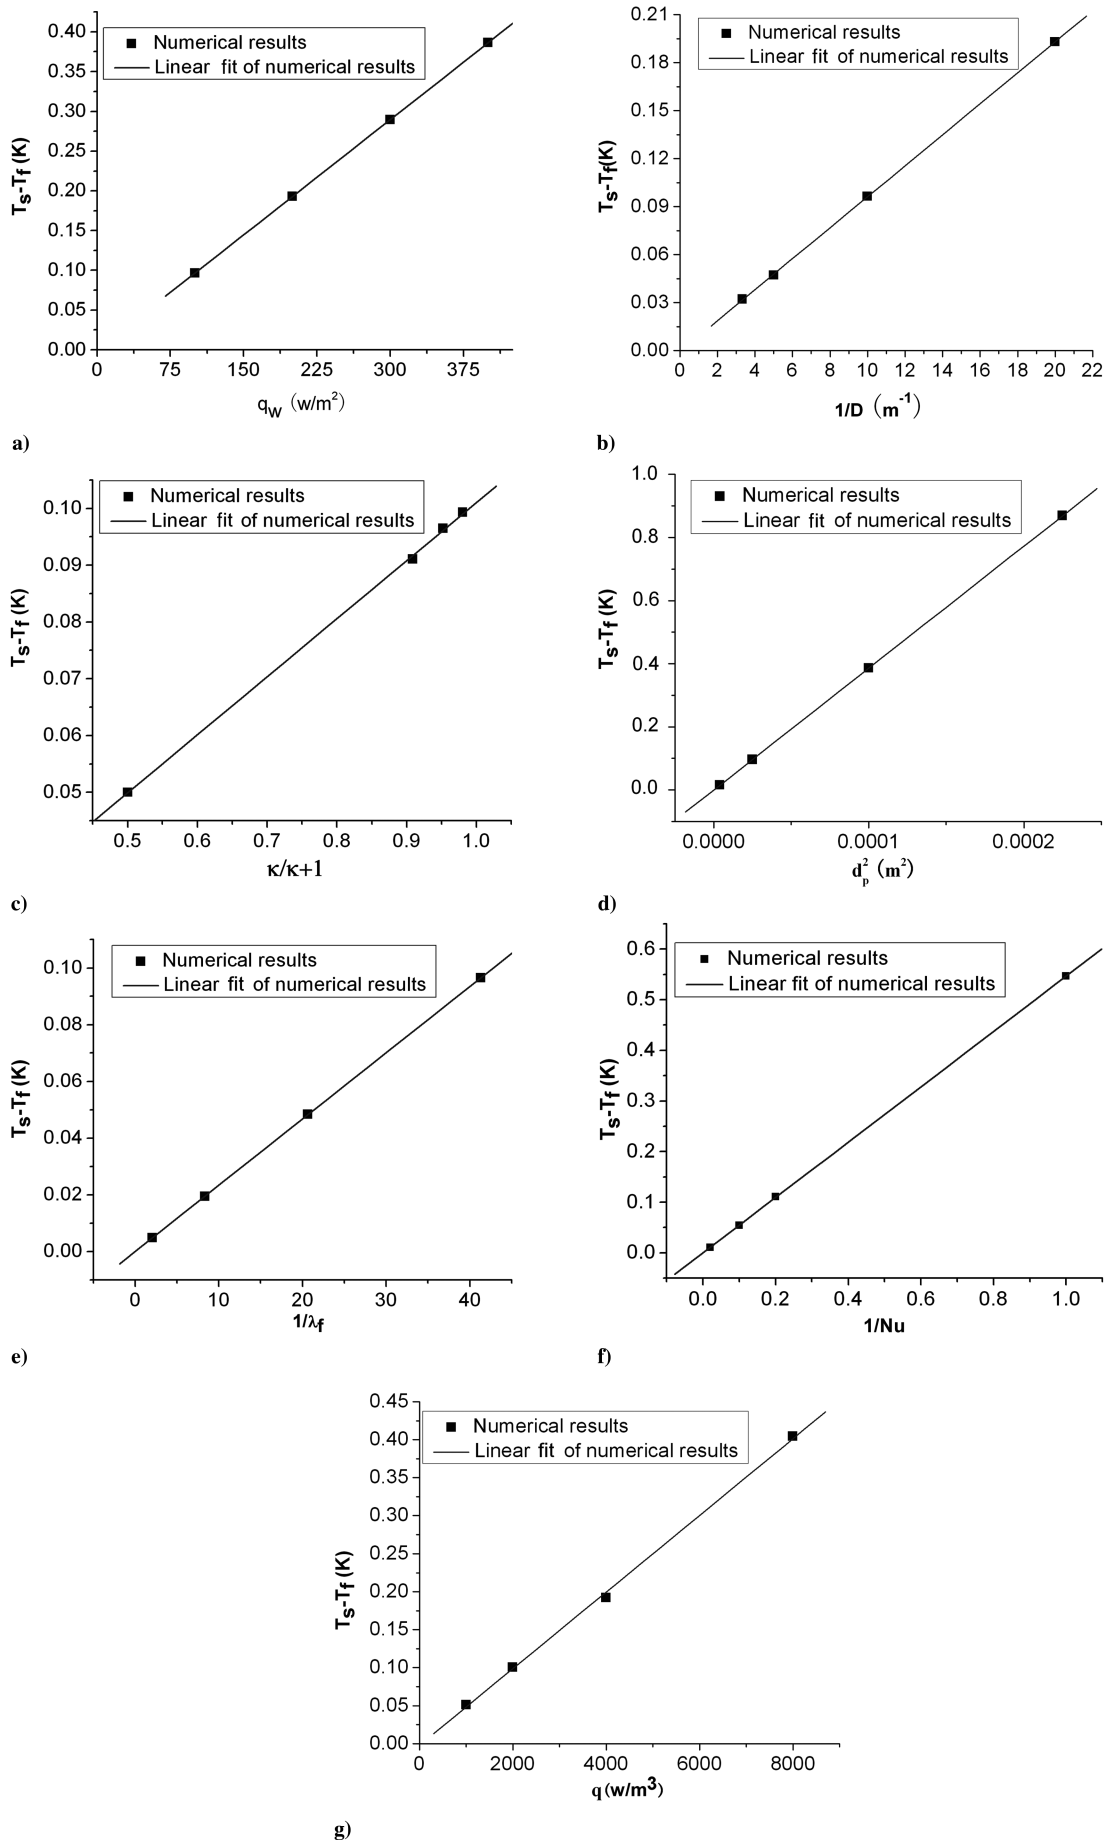


Fig. 2 Effect of pertinent parameters at the average temperature difference between two phases: a) boundary heat flux, b) characteristic length, c) effective thermal conductivity ratio, d) characteristic length for pore size, e) effective conductivity of fluid, f) Nusselt number, and g) heat source of solid phase.

In this case, the Nusselt number based on the interstitial heat transfer coefficient can be expressed in the form of

$$Nu = B + CP r^d Re_{d_p}^f, \quad 0 < d < 1, \quad f > 0 \quad (29)$$

So, the criterion also can be written as

$$\frac{(q_w/S)(\kappa/\kappa + 1)d_p^2 + qd_p^2}{A(B + CP r^d Re_{d_p}^f)\lambda_{f,\text{eff}}\varphi} \rightarrow 0 \quad (30)$$

### B. Compared with Equation (1)

For the case in which conduction is the dominant heat transfer mode, the  $Nu$  approaches  $B$ , if there is no heat source in the solid phase, the criterion is expressed as

$$T_s - T_f = \frac{(q_w/S)(\kappa/\kappa + 1)d_p^2}{AB\lambda_{f,\text{eff}}\varphi} \rightarrow 0 \quad (31)$$

Here,

$$q_w \cdot L = (\rho C_p)_f S \cdot u \cdot \Delta T_L \quad (32)$$

Equation (31) can be rewritten as

$$T_s - T_f = \frac{(\rho C_p)_f \Delta T_L d_p^2}{ABt\varphi} \frac{\kappa}{\kappa + 1} \frac{1}{\lambda_{f,\text{eff}}} \quad (33)$$

And so,

$$\frac{\Delta T_L}{\Delta T_L} = \frac{T_s - T_f}{\Delta T_L} = \frac{(\rho C_p)_f d_p^2}{ABt\varphi} \frac{\kappa}{\kappa + 1} \frac{1}{\lambda_{f,\text{eff}}} \ll 1 \quad (34)$$

Then, Eq. (1) can be rewritten as

$$\frac{\varphi(\rho C_p)_f d_p^2}{t} \frac{\kappa + 1}{\kappa} \frac{1}{\lambda_f} \ll 1 \quad (35)$$

It can be seen from Eqs. (34) and (35) that these two criteria are coincident, excluding the effect of  $\kappa$ . When the conductivity of fluid is fixed, the assumption of local thermal equilibrium is valid as the effective solid-to-fluid thermal conductivity is decreased. The same conclusion was drawn from the conclusion of Kim et al. [8], but it is worth mentioning that the conclusion gained by Eq. (35) is the opposite.

The criterion proposed in this study is more general than the previous criterion suggested by Kim and Jang [10], because the former includes the effect of effective thermal solid-to-fluid conductivity ratio.

## V. Conclusions

A more general criterion for local thermal equilibrium under the condition of constant wall heat flux is presented in terms of parameters of engineering importance, which include the boundary heat flux, the area of cross section, the effective thermal solid-to-fluid conductivity ratio, characteristic length for pore size, Nusselt number, effective fluid conductivity, and heat source of the solid phase. The results presented in this study show that the effect of local thermal equilibrium on a porous medium will become larger with the decrease of the boundary heat flux, characteristic length for pore size, and heat source of the solid phase, as well as with the increase of the effective fluid Prandtl number, the particle Reynolds number, and effective fluid thermal conductivity. In addition, when the effective solid-to-fluid thermal conductivity ratio is small, its effect is significant.

## Acknowledgment

This work was funded by the National Key Basic Research Development Program of China (No. 2007CB206900).

## References

- [1] Carbonell, R. G., and Whitaker, S., *Heat and Mass Transfer in Porous Media*, edited by J. Bear, and M. Y. Corapcigolu, Fundamentals of Transport Phenomena in Porous Media, Martinus-Nijhoff, Dordrecht, The Netherlands, 1984, pp. 121–198.
- [2] Whitaker, S., “Improved Constraints for the Principle of Local Thermal Equilibrium,” *Industrial and Engineering Chemistry Research*, Vol. 30, No. 5, 1991, pp. 983–997. doi:10.1021/ie00053a022
- [3] Quintard, M., and Whitaker, S., “Local Thermal Equilibrium for Transient Heat Conduction: Theory and Comparison with Numerical Experiments,” *International Journal of Heat and Mass Transfer*, Vol. 38, No. 15, 1995, pp. 2779–2796. doi:10.1016/0017-9310(95)00028-8
- [4] Quintard, M., and Whitaker, S., *Theoretical Modeling of Transport in Porous Media*, 1st ed., edited by K. Vafai, Handbook of Heat Transfer in Porous Media, Marcel Dekker, New York, 2000, Chap. 1.
- [5] Amiri, A., and Vafai, K., “Analysis of Dispersion Effects and Nonthermal Equilibrium, Non-Darcian, Variable Porosity Incompressible Flow Through Porous Media,” *International Journal of Heat and Mass Transfer*, Vol. 37, No. 6, 1994, pp. 939–954. doi:10.1016/0017-9310(94)90219-4
- [6] Nield, D. A., “Effects of Local Thermal Nonequilibrium in Steady Convective Processes in a Saturated Porous Medium: Forced Convection in a Channel,” *Journal of Porous Media*, Vol. 1, No. 2, 1998, pp. 181–186.
- [7] Lee, D. Y., and Vafai, K., “Analytical Characterization and Conceptual Assessment of Solid and Fluid Temperature Differentials in Porous Media,” *International Journal of Heat and Mass Transfer*, Vol. 42, No. 3, 1999, pp. 423–435. doi:10.1016/S0017-9310(98)00185-9
- [8] Kim, S. J., Kim, D., and Lee, D. Y., “On the Local Thermal Equilibrium in Microchannel Heat Sink,” *International Journal of Heat and Mass Transfer*, Vol. 43, No. 10, 2000, pp. 1735–1748. doi:10.1016/S0017-9310(99)00259-8
- [9] Kaviany, M., *Principles of Heat Transfer in Porous Media*, 2nd ed., Springer, Berlin, 1995, Chap. 3.
- [10] Kim, S. J., and Jang, S. P., “Effects of the Darcy Number, the Prandtl Number, and the Reynolds Number on Local Thermal Non-Equilibrium,” *International Journal of Heat and Mass Transfer*, Vol. 45, No. 19, 2002, pp. 3885–3896. doi:10.1016/S0017-9310(02)00109-6
- [11] Amiri, A., Vafai, K., and Kuzay, T. M., “Effects of Boundary Conditions on Non-Darcian Heat Transfer Through Porous Media and Experimental Comparisons,” *Numerical Heat Transfer, Part A: Applications*, Vol. 27, No. 6, 1995, pp. 651–664. doi:10.1080/10407789508913724
- [12] Ergun, S., “Fluid Flow Through Packed Columns,” *Chemical Engineering Progress*, Vol. 48, No. 2, 1952, pp. 89–94.
- [13] Vafai, K., “Convective Flow and Heat Transfer in Variable-Porosity Media,” *Journal of Fluid Mechanics*, Vol. 147, No. 1, 1984, pp. 233–259. doi:10.1017/S002211208400207X
- [14] Wakao, N., Kagueli, S., and Funazkri, T., “Effect of Fluid Dispersion Coefficients on Particle-to-Fluid Heat Transfer Coefficients in Packed Beds,” *Chemical Engineering Progress*, Vol. 34, No. 3, 1979, pp. 325–336.
- [15] Kar, K. K., and Dybbs, A., “Internal Heat Transfer Coefficient of Porous Metals,” *ASME Proceedings of the Winter Annual Meeting*, American Society of Mechanical Engineers, Fairfield, NJ, 1982, pp. 81–91.
- [16] Maiorov, V., Vasiliev, L., and Polyayev, V. M., “Porous Heat Exchangers Classification Application,” *Journal of Engineering Physics*, Vol. 47, No. 3, 1984, pp. 1110–1123. doi:10.1007/BF00873730
- [17] Fu, X., Viskanta, R., and Gore, J. P., “Measurement and Correlation of Volumetric Heat Transfer Coefficients of Cellular Ceramics,” *Experimental Thermal and Fluid Science*, Vol. 17, No. 4, 1998, pp. 285–293. doi:10.1016/S0894-1777(98)10002-X